

**Features:**

- n Center amplifying gate
- n Metal case with ceramic insulator
- n Low on-state and switching losses

**Typical Applications:**

- n AC controllers
- n DC and AC motor control
- n Controlled rectifiers

**Part No. Y80KPE-KT75cT**

$I_{T(AV)}$	<b>3500A</b>
$V_{DRM}, V_{RRM}$	<b>1200V 1400V</b>
	<b>1600V 1800V</b>
$I_{TSM}$	<b>58 kA</b>

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	$T_j(^{\circ}C)$	VALUE			UNIT
				Min	Type	Max	
$I_{T(AV)}$	Mean on-state current	180° half sine wave 50Hz Double side cooled,	$T_C=70^{\circ}C$			3940	A
			$T_C=55^{\circ}C$			4603	A
			$T_C=85^{\circ}C$			3188	A
$I_{DRM}$ $I_{RRM}$	Repetitive peak current	at $V_{DRM}$ at $V_{RRM}$	125			250	mA
$I_{TSM}$	Surge on-state current	10ms half sine wave $V_R=0V_{RRM}$	125			58	kA
$I^2t$	$I^2t$ for fusing coordination					16820	$10^3A^2s$
$V_{TO}$	Threshold voltage		125			0.77	V
$r_T$	On-state slope resistance					0.09	m $\Omega$
$V_{TM}$	Peak on-state voltage	$I_{TM}=5000A, F=40kN$	25			1.60	V
dv/dt	Critical rate of rise of off-state voltage	$V_{DM}=0.67V_{DRM}$	125			1000	V/ $\mu s$
di/dt	Critical rate of rise of on-state current	$V_{DM}=67\%V_{DRM}$ to 2500A, Gate pulse $t_r \leq 0.5\mu s$ $I_{GM}=1.5A$ .	125			200	A/ $\mu s$
$I_{GT}$	Gate trigger current	$V_A=12V, I_A=1A$	25	40		300	mA
$V_{GT}$	Gate trigger voltage			0.8		3.0	V
$I_H$	Holding current			20		300	mA
$I_L$	Latching current					1500	mA
$V_{GD}$	Non-trigger gate voltage	$V_{DM}=67\%V_{DRM}$	125			0.3	V
$R_{th(j-c)}$	Thermal resistance Junction to case	At 180° sine. double side cooled Clamping force 40kN				0.0085	$^{\circ}C/W$
$R_{th(c-h)}$	Thermal resistance case to heatsink					0.0020	
$F_m$	Mounting force			63		84	kN
$T_{vj}$	Junction temperature			-40		125	$^{\circ}C$
$T_{stg}$	Stored temperature			-40		150	$^{\circ}C$
$W_t$	Weight				1230		g
Outline	KT75cT						

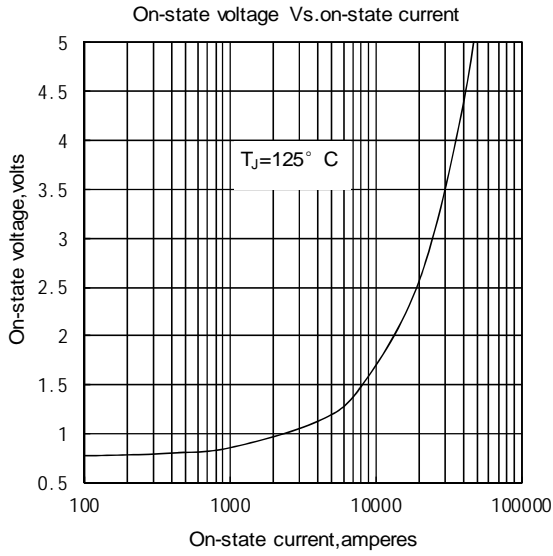


Fig.1

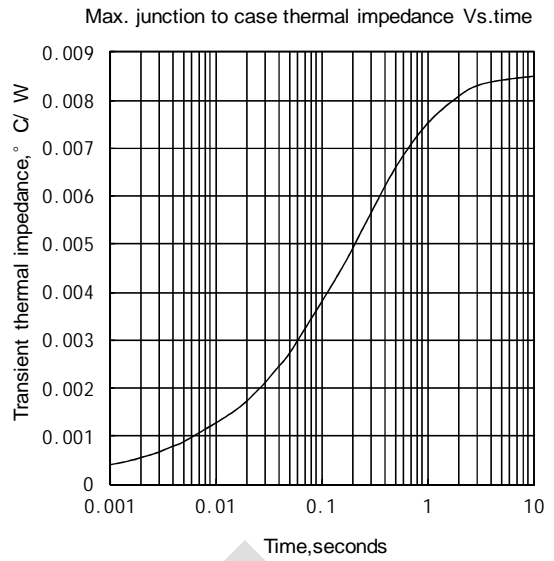


Fig.2

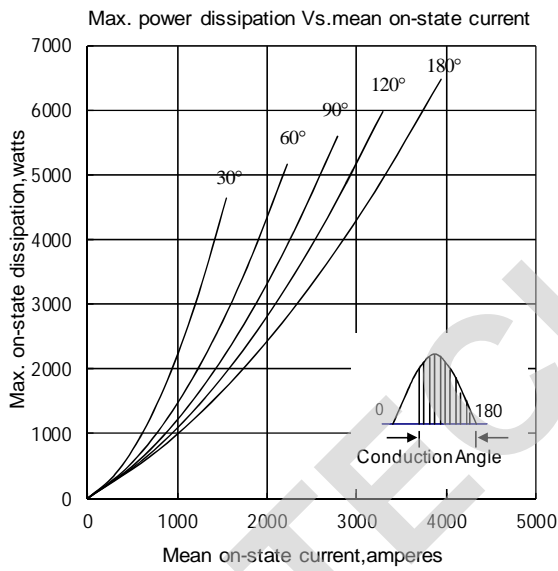


Fig.3

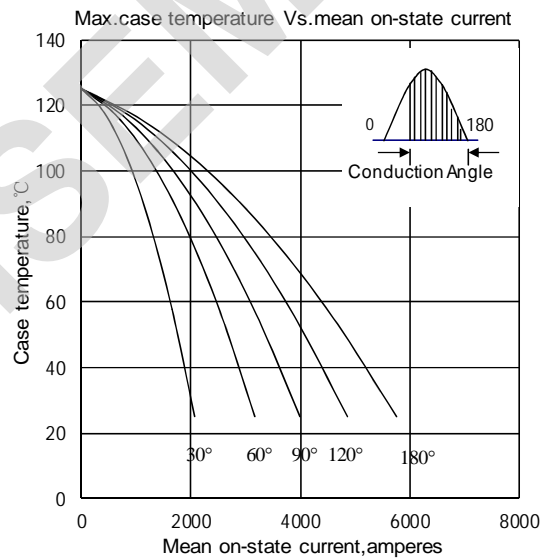


Fig.4

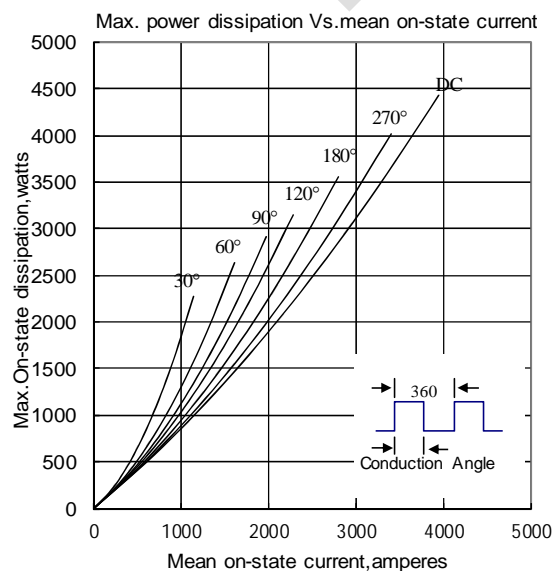


Fig.5

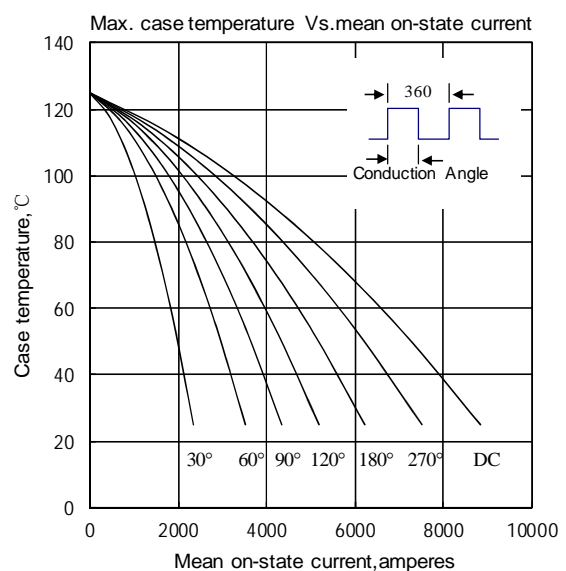


Fig.6

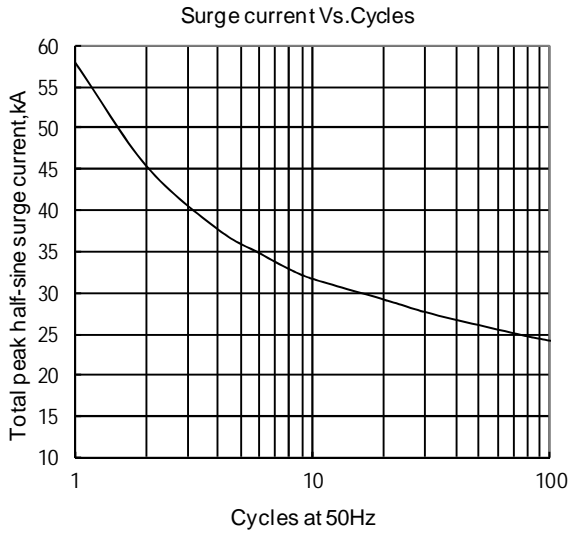


Fig. 7

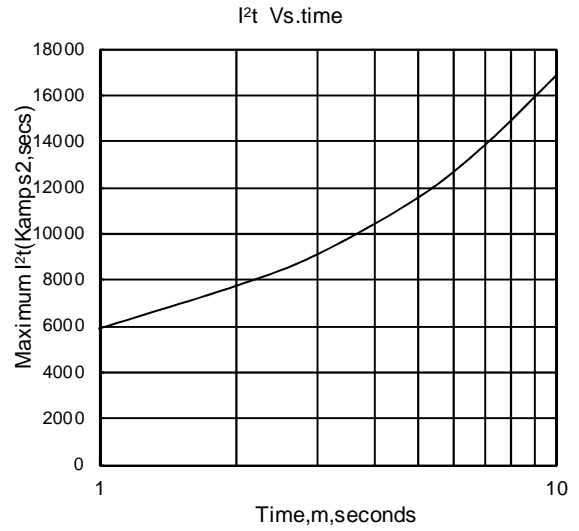


Fig. 8

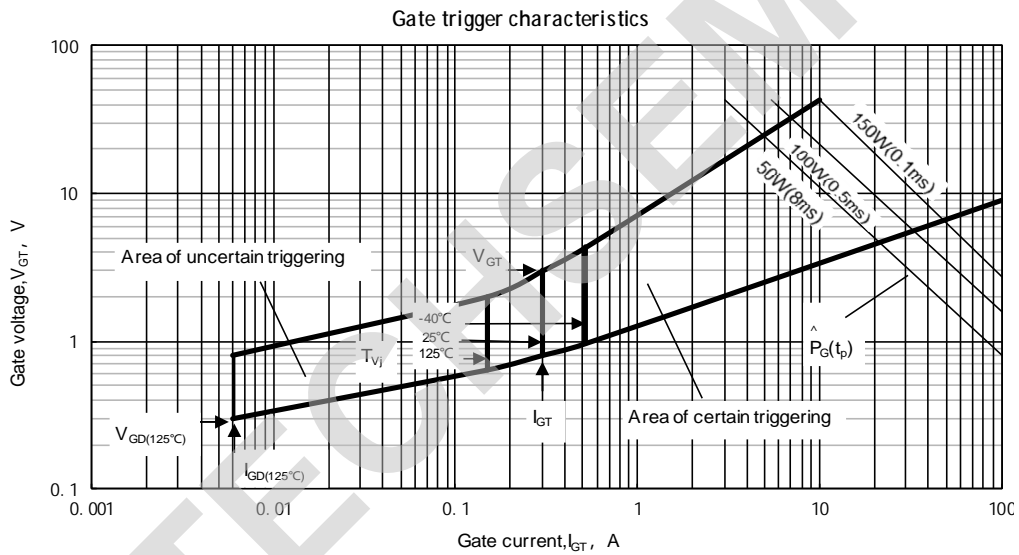


Fig.9

Outline:

