

**Features:**

- Isolated mounting base 2500V~
 - Pressure contact technology with Increased power cycling capability
 - Space and weight saving
- Typical Applications**
- Various rectifiers
 - DC supply for PWM inverter

V _{RRM}	Type & Outline		
	MDx40-08-215F3	MDx40-10-215F3	MDx40-12-215F3
800V	MDx40-14-215F3	MDx40-16-215F3	MDx40-18-215F3
1000V	MDx40-18-215F3	MDx40-20-215F3	MD40-22-215F3G
1200V			
1400V			
1600V			
1800V			
1800V			

MDx stands for any type of **MDC**, **MDA**, **MDK**

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	T _j (°C)	VALUE			UNIT
				Min	Type	Max	
I _{F(AV)}	Mean forward current	180° half sine wave 50Hz Single side cooled, T _c =100°C	150			40	A
I _{F(RMS)}	RMS forward current					63	A
I _{RRM}	Repetitive peak current	at V _{RRM}	150			8	mA
I _{FSM}	Surge forward current	V _R =60%V _{RRM} , t=10ms half sine	150			1.0	kA
I ² t	I ² t for fusing coordination					5.0	10 ³ A ² s
V _{FO}	Threshold voltage		150			0.80	V
r _F	Forward slope resistance					5.57	mΩ
V _{FM}	Peak forward voltage	I _{FM} =120A	25			1.47	V
R _{th(j-c)}	Thermal resistance Junction to case	Single side cooled per chip				0.90	°C/W
R _{th(c-h)}	Thermal resistance case to heatsink	Single side cooled per chip				0.20	°C/W
V _{iso}	Isolation voltage	50Hz,R.M.S,t=1min,I _{iso} :1mA(MAX)		2500			V
F _m	Terminal connection torque(M5)			2.5		4.0	N·m
	Mounting torque(M6)			4.5		6.0	N·m
T _{vj}	Junction temperature			-40		150	°C
T _{stg}	Stored temperature			-40		125	°C
W _t	Weight				120		g
Outline			215F3				

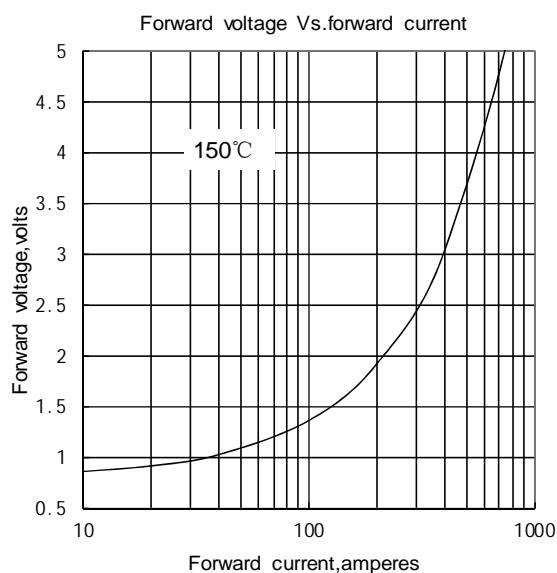


Fig.1

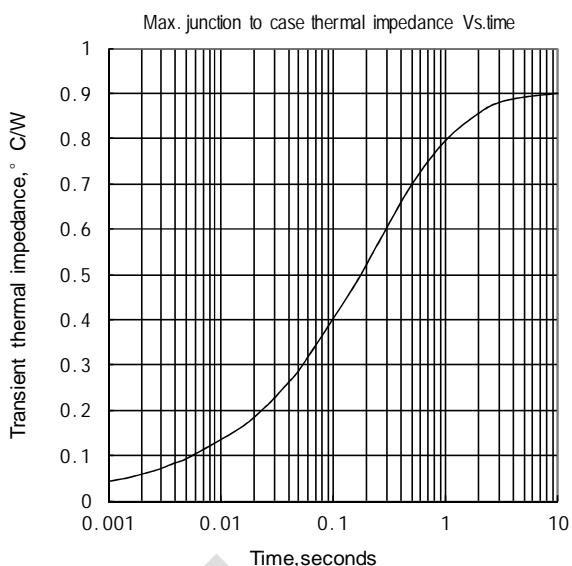


Fig.2

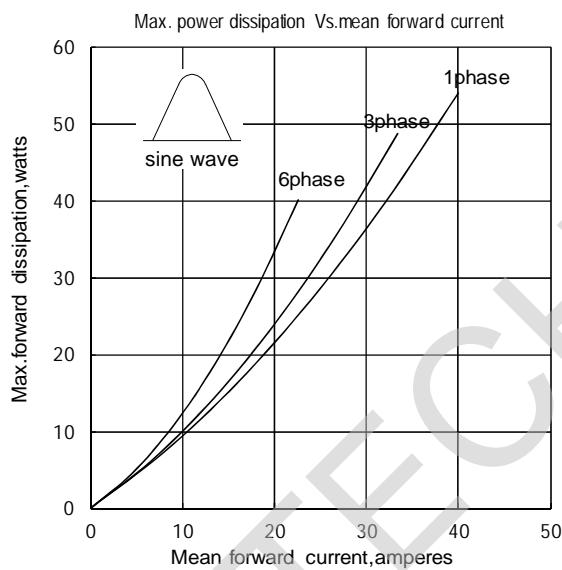


Fig.3

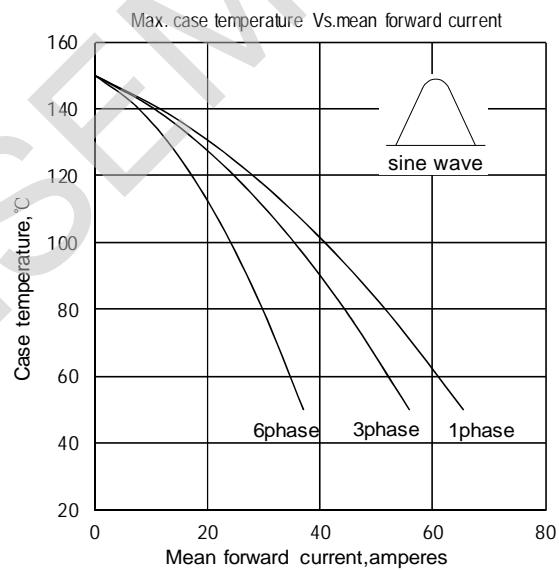


Fig.4

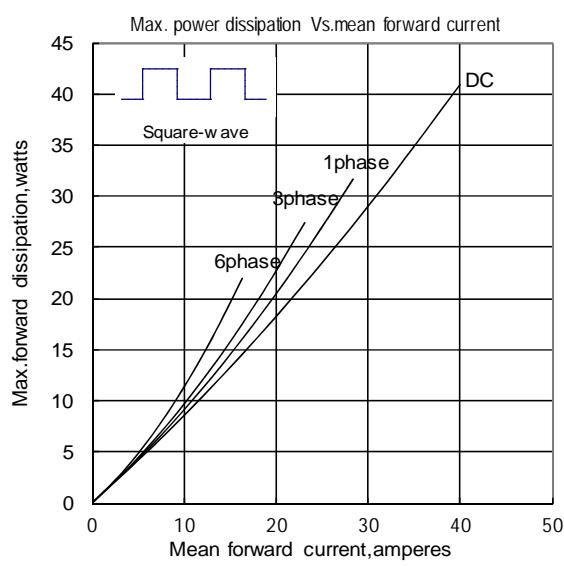


Fig.5

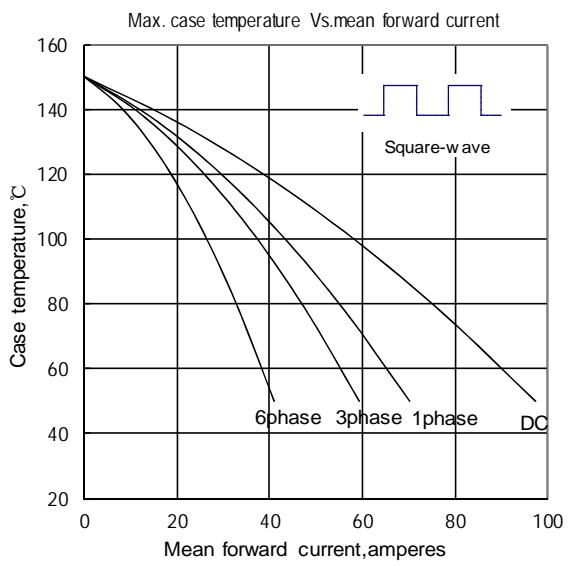


Fig.6

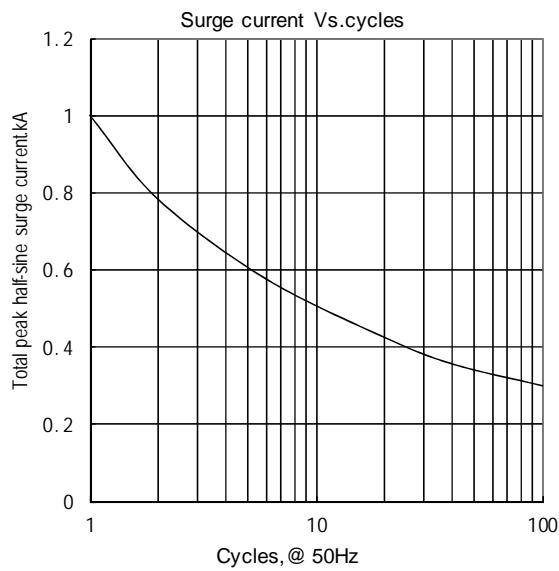


Fig.7

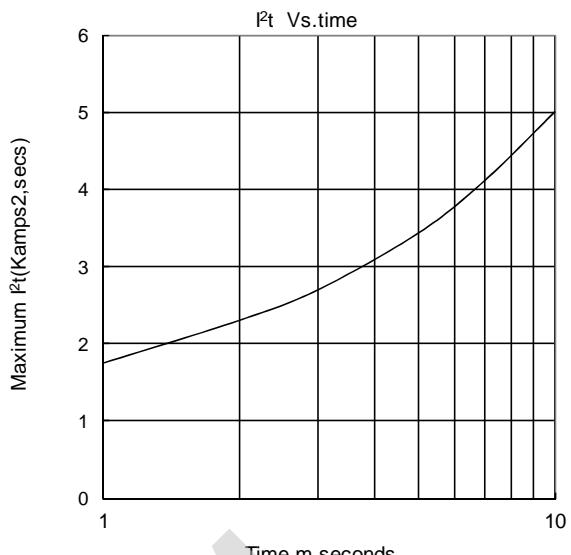
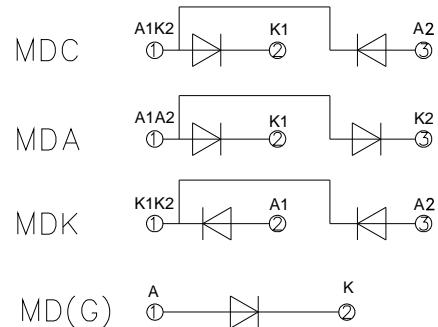
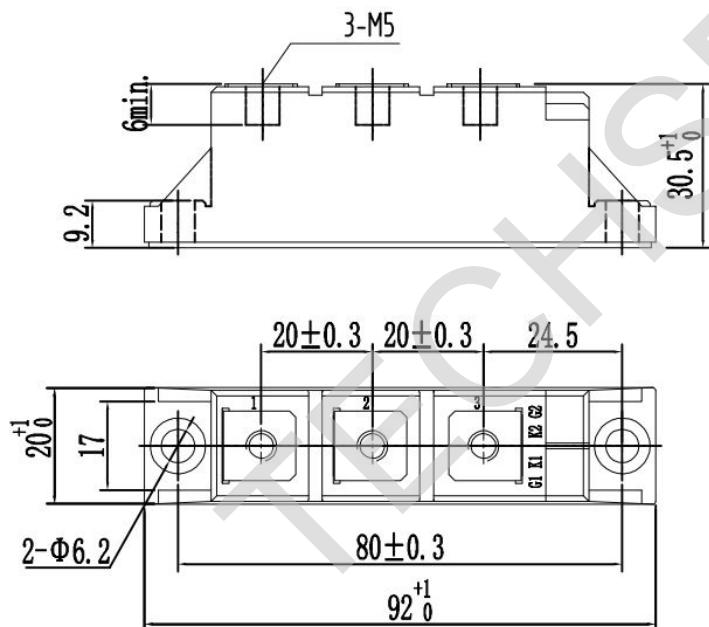


Fig.8

Outline:

Unmarked dimensional tolerance: ±0.5mm