



Features

- Interdigitated amplifying gates
- Fast turn-on and high di/dt
- Low switching losses

Typical Applications

- Inductive heating
- Electronic welders
- Self-commutated inverters

Part No. H76KKM-KT60c(d)T

I_{T(AV)}	2000A	
V_{DRM}, V_RRM	4200V	4500V
	4800V	5000V
	5200V	
t_q	50~150μs	

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	T _J (°C)	VALUE			UNIT
				Min	Type	Max	
I _{T(AV)}	Mean on-state current	180° half sine wave 50Hz Double side cooled, T _C =55°C	125			2000	A
V _{DRM} V _R RM	Repetitive peak off-state voltage Repetitive peak reverse voltage	tp=10ms	125	4100		5200	V
I _{DRM} I _R RM	Repetitive peak current	at V _{DRM} at V _R RM	125			250	mA
I _{TSM}	Surge on-state current	10ms half sine wave	125			25	kA
I ² t	I ² t for fusing coordination	V _R =0.6V _R RM					3125
V _{TO}	Threshold voltage		125			1.68	V
r _T	On-state slope resistance						0.26
V _{TM}	Peak on-state voltage	I _{TM} =2000A, F=70kN	25			3.20	V
dv/dt	Critical rate of rise of off-state voltage	V _{DM} =0.67V _{DRM}	125			1000	V/μs
di/dt	Critical rate of rise of on-state current	V _{DM} = 67%V _{DRM} , to4000A Gate pulse t _r ≤0.5μs I _{GM} =1.5A Single pulse	125			500	A/μs
Q _{rr}	Recovery charge	I _{TM} =2000A, tp=4000μs, di/dt=-20A/μs, V _R =100V	125		4000		μC
t _q	Circuit commutated turn-off time	I _{TM} =2000A, tp=4000μs, V _R =100V dv/dt=30V/μs, di/dt=-20A/μs	125	50		150	μs
I _{GT}	Gate trigger current	V _A =12V, I _A =1A	25	50		300	mA
V _{GT}	Gate trigger voltage			0.8		3.5	V
I _H	Holding current			40		1000	mA
I _L	Latching current					1000	mA
V _{GD}	Non-trigger gate voltage	V _{DM} =67%V _{DRM}	125			0.25	V
R _{th(j-c)}	Thermal resistance Junction to case	At 180° sine double side cooled Clamping force 40 kN				0.010	°C /W
R _{th(c-h)}	Thermal resistance case to heat sink					0.003	
F _m	Mounting force			35		47	kN
T _{vj}	Junction temperature			-40		125	°C
T _{stg}	Stored temperature			-40		140	°C
W _t	Weight				880/ 1140		g
Outline	KT60cT/KT60dT						

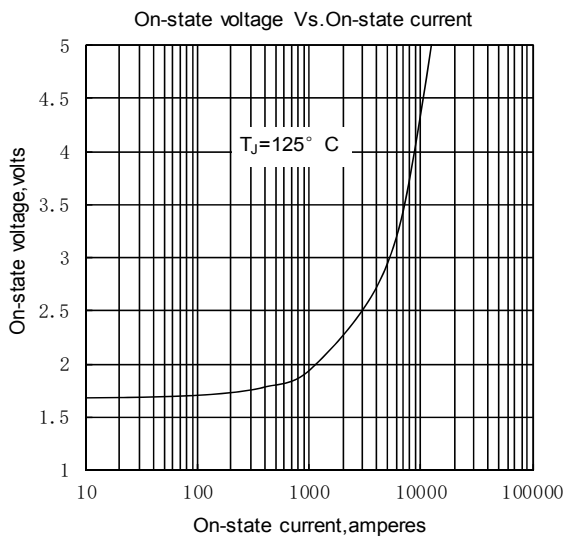


Fig. 1

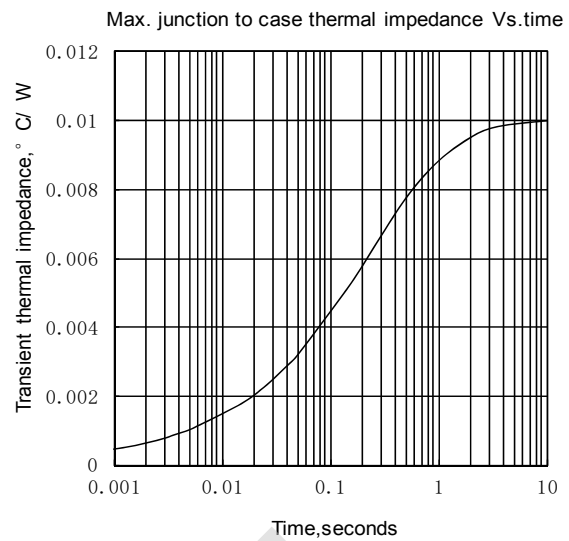


Fig. 2

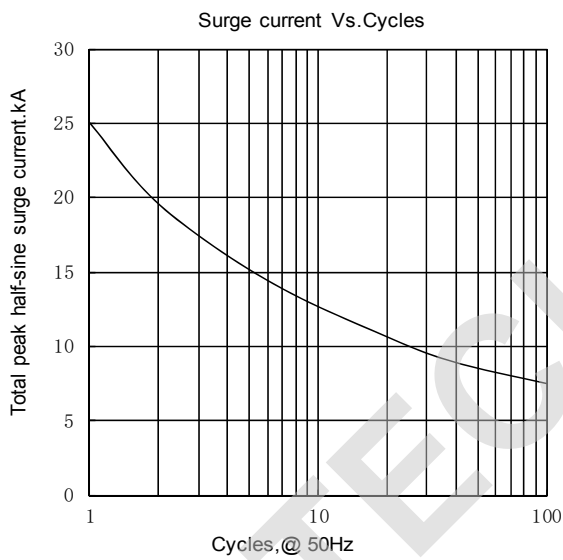


Fig. 3

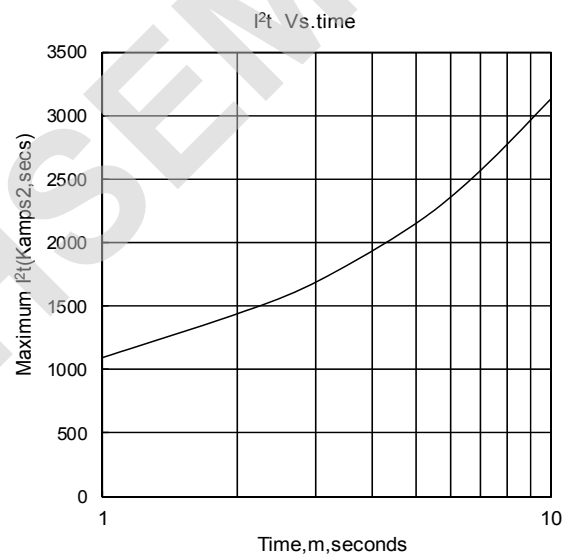


Fig. 4


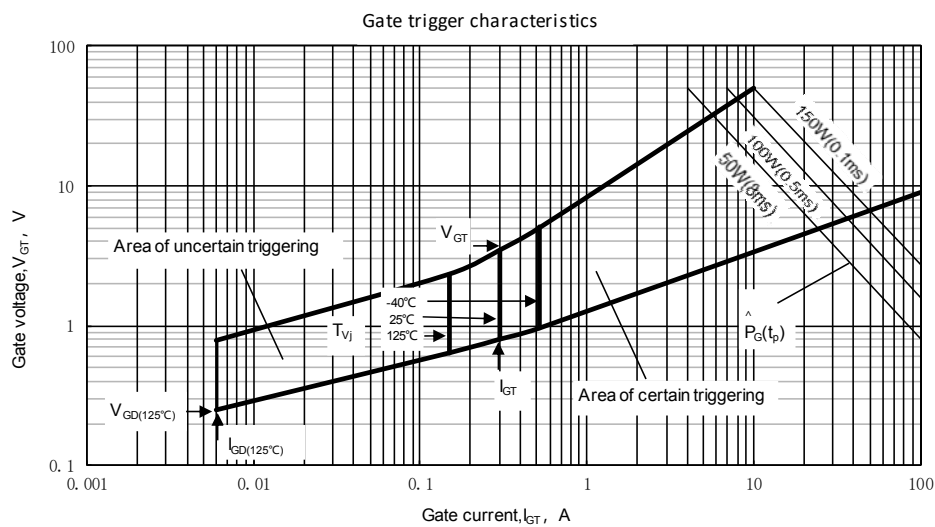


Fig.5

Outline:

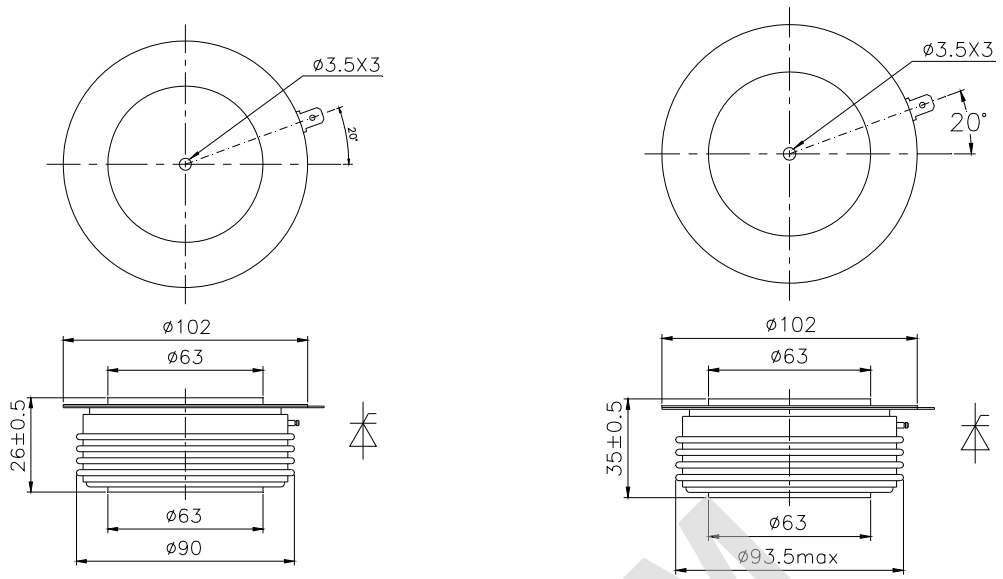

TECHSEM reserves the right to change specifications without notice.

TECHSEM