

**Features:**

- n Isolated mounting base 3000V~
- n Solder joint technology with increased power cycling capability
- n Space and weight saving

Typical Applications

- n AC/DC Motor drives
- n Various rectifiers
- n DC supply for PWM inverter

V _{DRM} , V _{R_{RRM}}	Type & Outline	
	800V	MFC135-08-229H3
1000V	MFC135-10-229H3	MFC135-10-229H3B
1200V	MFC135-12-229H3	MFC135-12-229H3B
1400V	MFC135-14-229H3	MFC135-14-229H3B
1600V	MFC135-16-229H3	MFC135-16-229H3B
1800V	MFC135-18-229H3	MFC135-18-229H3B

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	T _j (°C)	VALUE			UNIT
				Min	Type	Max	
I _{T(AV)}	Mean on-state current	180° half sine wave 50Hz Single side cooled, T _c =85°C	125			135	A
I _{T(RMS)}	RMS on-state current		125			212	A
I _{DRM} I _{R_{RRM}}	Repetitive peak current	at V _{DRM} at V _{R_{RRM}}	125			35	mA
I _{TSM}	Surge on-state current	10ms half sine wave V _R =60%V _{R_{RRM}}	125			3.5	kA
I ² t	I ² t for fusing coordination						61.3
V _{TO}	Threshold voltage		125			0.95	V
r _T	On-state slope resistance						1.50
V _{TM}	Peak on-state voltage	I _{TM} =410A	25			1.80	V
dv/dt	Critical rate of rise of off-state voltage	V _{DM} =67%V _{DRM}	125			1000	V/μs
di/dt	Critical rate of rise of on-state current	Gate source 1.5A t _r ≤ 0.5μs Repetitive	125			200	A/μs
I _{GT}	Gate trigger current	V _A =12V, I _A =1A	25	30		200	mA
V _{GT}	Gate trigger voltage			0.6		2.5	V
I _H	Holding current			10		250	mA
I _L	Latching current					1000	mA
V _{GD}	Non-trigger gate voltage	V _{DM} =67%V _{DRM}	125			0.2	V
R _{th(j-c)}	Thermal resistance Junction to case	Single side cooled per chip				0.18	°C/W
R _{th(c-h)}	Thermal resistance case to heatsink	Single side cooled per chip				0.08	°C/W
V _{iso}	Isolation voltage	50Hz, R.M.S, t=1min, I _{iso} : 1mA(MAX)		3000			V
F _m	Terminal connection torque(M6)			4.5		6.0	N·m
	Mounting torque(M6)			4.5		6.0	N·m
T _{vj}	Junction temperature			-40		125	°C
T _{stg}	Stored temperature			-40		125	°C
W _t	Weight				165		g
Outline	229H3/229H3B						

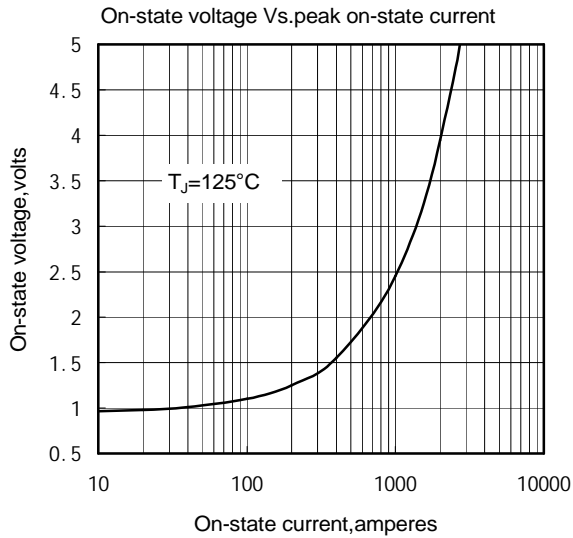


Fig1

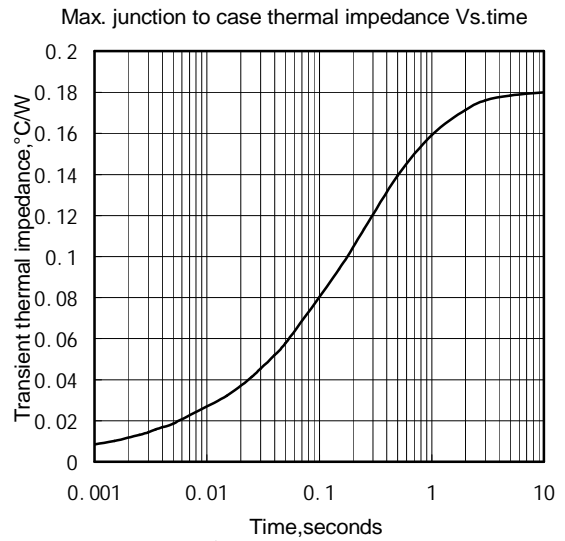


Fig2

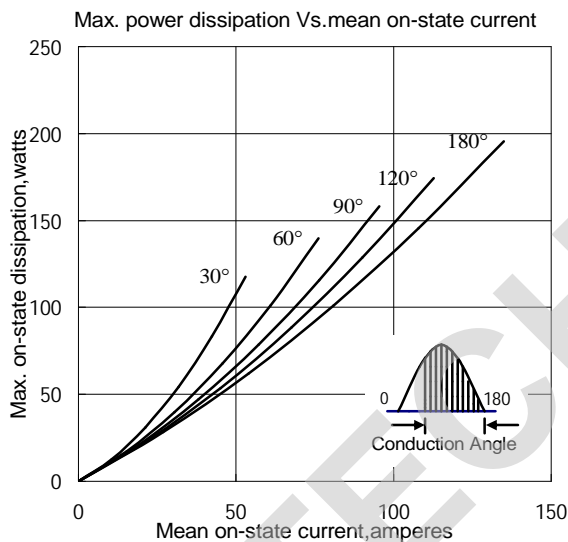


Fig3

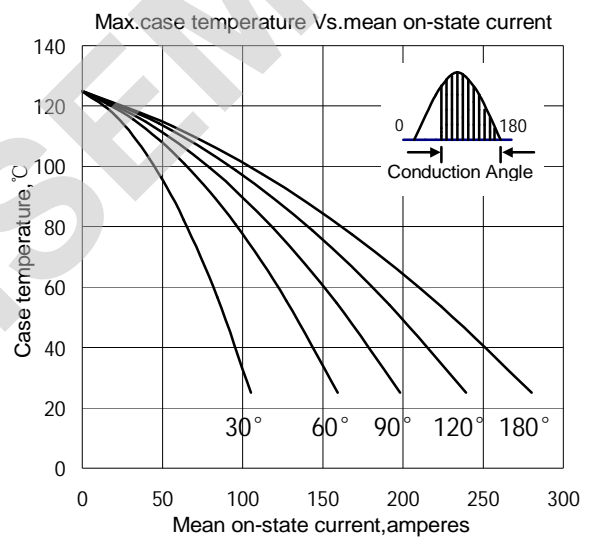


Fig4

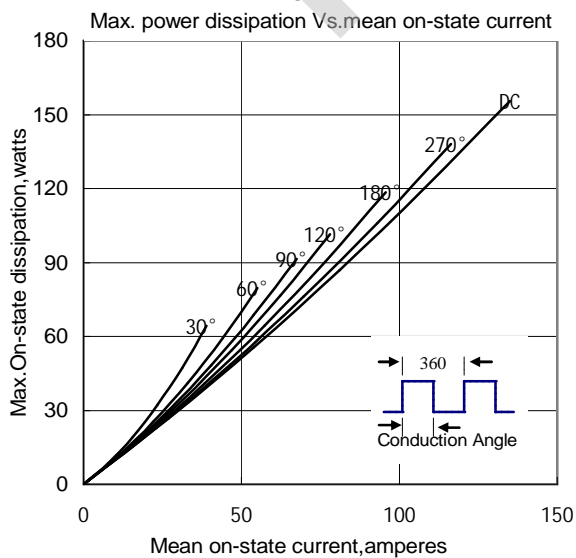


Fig5

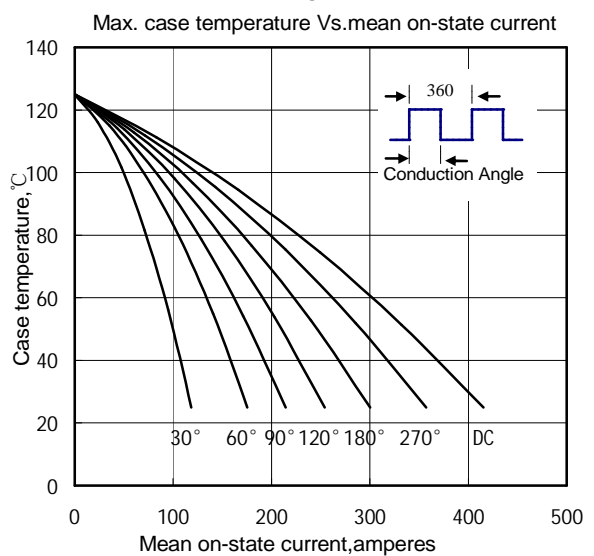


Fig6

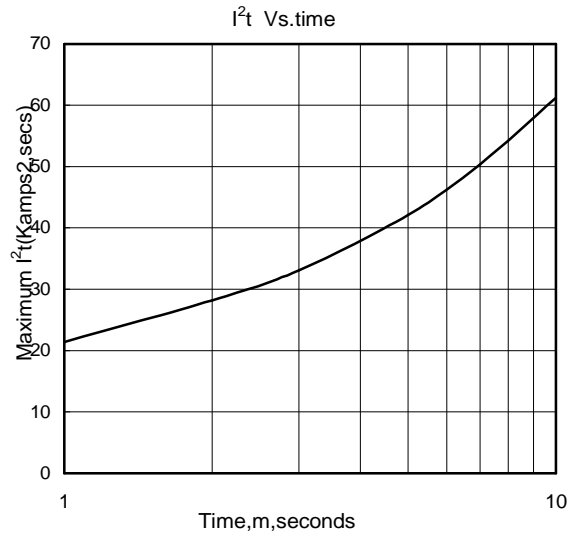
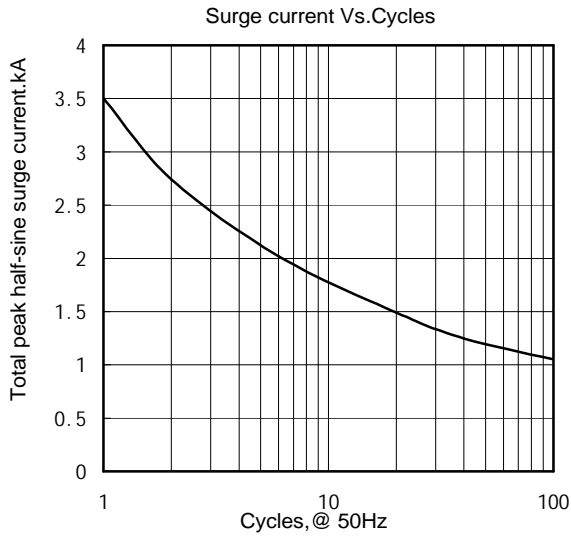


Fig7

Fig8




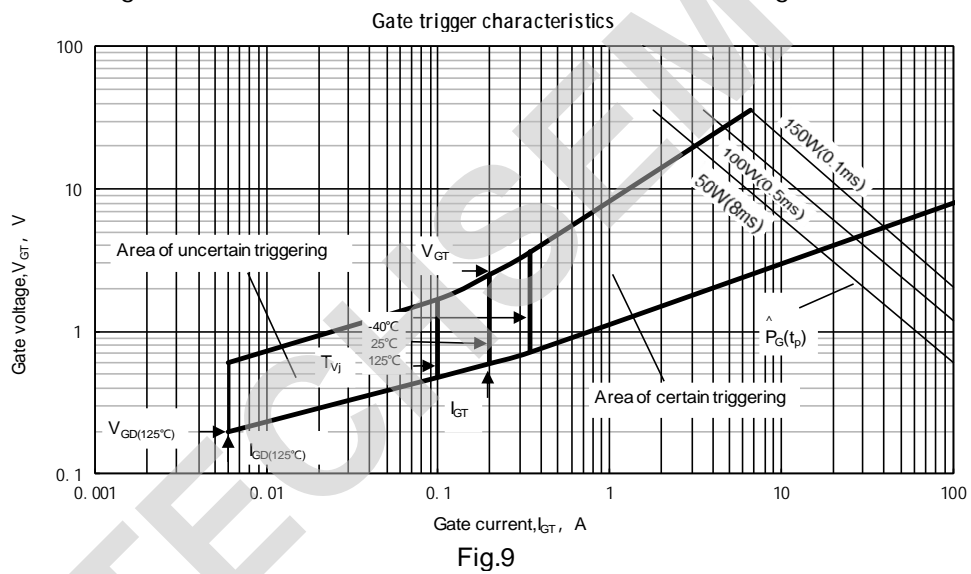


Fig.9

Outline:

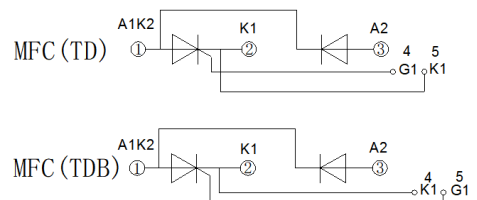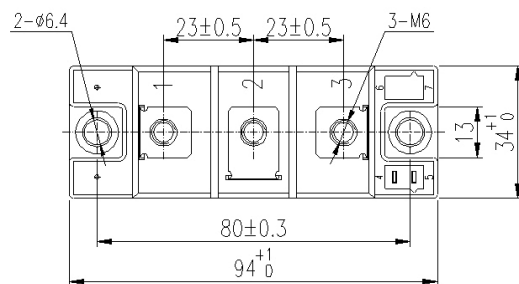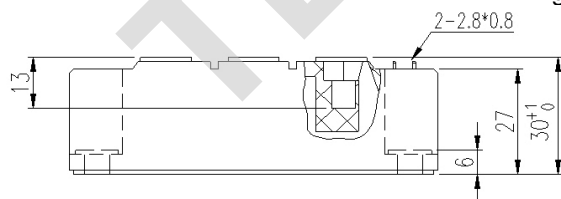

Unmarked dimensional tolerance: $\pm 0.5mm$

TECHSEM reserves the right to change specifications without notice.